


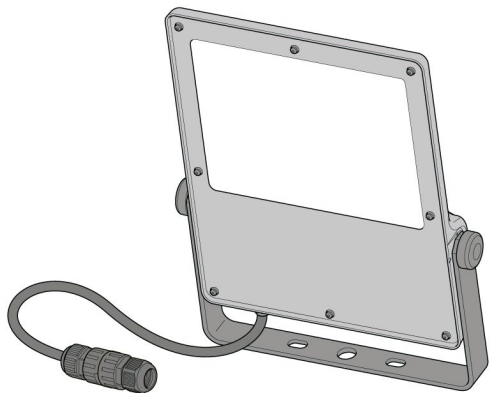


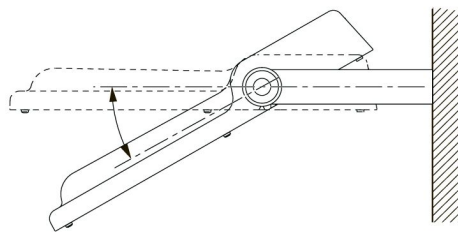


Code	Type	LED current	Initial luminous flux lm	Power, W	Lm/W	Weight kg
600151431007	DKF301 LED120 106W 740 I SYMD	0,7	12000	106	113,21	7
600151431008	DKF301 LED120 106W 740 I ASMD	0,7	12000	106	113,21	7
600151431009	DKF301 LED120 106W 740 I ASWD	0,7	12000	106	113,21	7
600151431010	DKF301 LED150 128W 740 I SYMD	0,7	15000	128	117,19	7
600151431011	DKF301 LED150 128W 740 I ASMD	0,7	15000	128	117,19	7
600151431012	DKF301 LED150 128W 740 I ASWD	0,7	15000	128	117,19	7
600151431013	DKF301 LED180 157W 740 I SYMD	0,7	18000	157	114,65	7
600151431014	DKF301 LED180 157W 740 I ASMD	0,7	18000	157	114,65	7
600151431015	DKF301 LED180 157W 740 I ASWD	0,7	18000	157	114,65	7
600151431016	DKF302 LED210 185W 740 I SYMD	0,8	21000	185	113,51	13
600151431017	DKF302 LED210 185W 740 I ASMD	0,8	21000	185	113,51	13
600151431018	DKF302 LED210 185W 740 I ASWD	0,8	21000	185	113,51	13
600151431019	DKF302 LED240 212W 740 I SYMD	0,7	24000	212	113,21	13
600151431020	DKF302 LED240 212W 740 I ASMD	0,7	24000	212	113,21	13
600151431021	DKF302 LED240 212W 740 I ASWD	0,7	24000	212	113,21	13
600151431022	DKF302 LED270 235W 740 I SYMD	0,7	27000	235	114,89	13
600151431023	DKF302 LED270 235W 740 I ASMD	0,7	27000	235	114,89	13
600151431024	DKF302 LED270 235W 740 I ASWD	0,7	27000	235	114,89	13

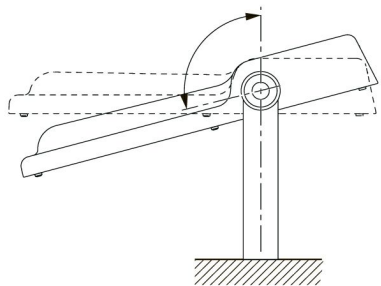


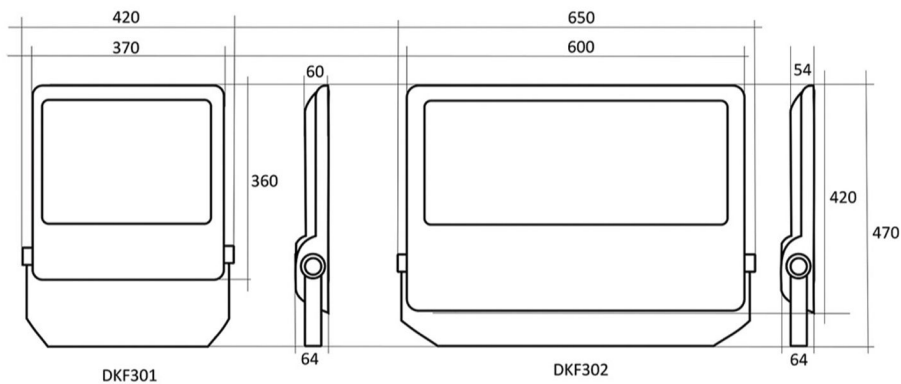




Install the luminaire according to the national regulations.

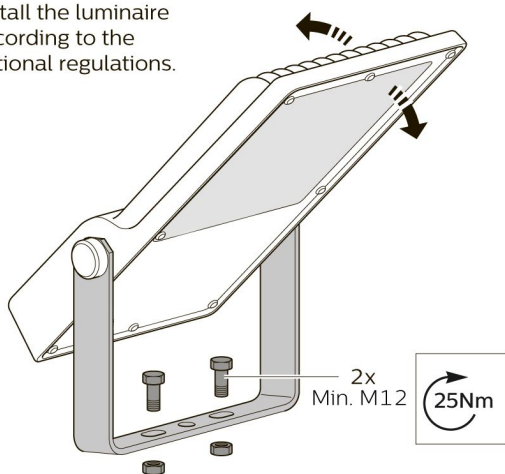


In case of using only the central hole fixation and if the luminaire is higher >3 m, the use of 2nd fixing security system is mandatory.

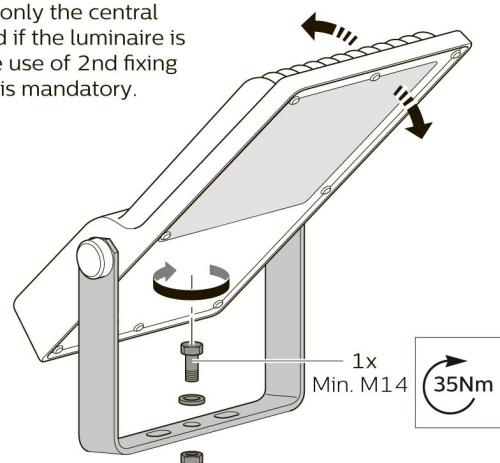




PSU



Min. $3 \times 1,0 \text{ mm}^2$
Max. $3 \times 2,5 \text{ mm}^2$
 $\varnothing 7 - \varnothing 12 \text{ mm}$

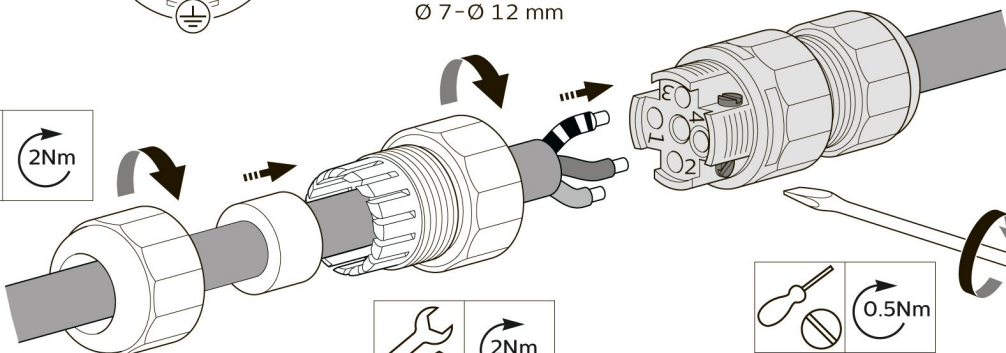

glass maintenance instruction

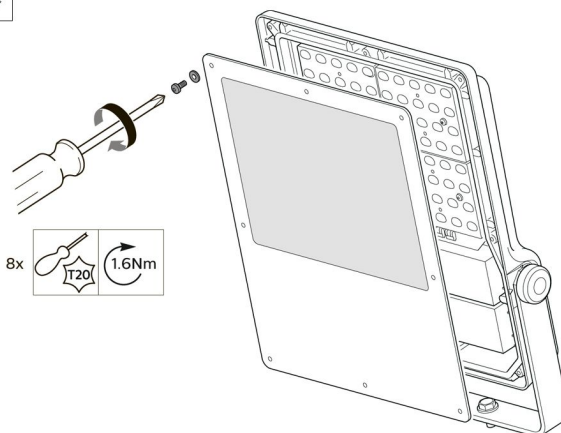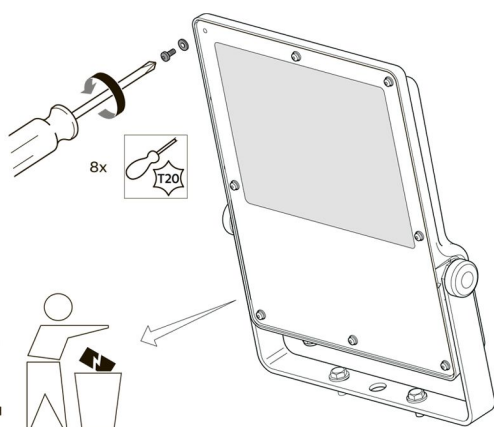

- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- The luminaire shall be installed or maintained by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Outdoor use only.