


Waterproof luminaires



FCW 111



Type	FCW 111	Operating temperature range	-10 to +40 °C
Light source	T8, T5 fluorescent lamps	Optical cover	Polycarbonate diffuser
Number of lamps	1 - 2 depending on type	Body material	Impact-resistant polymer PC
Input voltage	220 - 240 V	Color	White
Power factor	0,95	Impact resistance	IK10
Power consumption	31 - 127 W depending on type	Ingress protection	IP65
Control gear	Electronic	Electrical safety	Class I
		Application	• Parking garages • Warehouses • General lighting

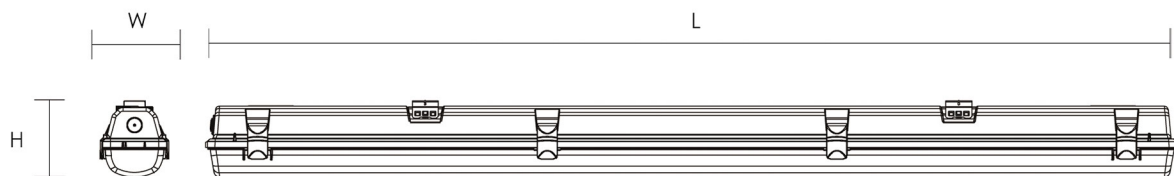

Type	L	W	H
FCW 111 136	1277	95	95 (mm)
FCW 111 236	1277	95	95 (mm)
FCW 111 158	1577	95	95 (mm)
FCW 111 258	1577	95	95 (mm)

Benefits


- A professional luminaire for wide usage
- Especially for applications, where high impact resistance (IK-rate) is required

Product family range


Code	Type	Control gear	Power consumption	Light source	Weight kg	Ingress protection
700452252001	FCW 111 136 Line EL	Electronic	39	T8 1x36	1,95	IP 65
700452252002	FCW 111 236 Line EL	Electronic	79	T8 2x36	2,48	IP 65
700452252003	FCW 111 158 Line EL	Electronic	63	T8 1x58	2,16	IP 65
700452252004	FCW 111 258 Line EL	Electronic	127	T8 2x58	2,72	IP 65
700452252041	FCW 111 128 Line EL	Electronic	31	T5 1x28	1,95	IP 65
700452252042	FCW 111 228 Line EL	Electronic	62	T5 2x28	2,48	IP 65
700452252045	FCW 111 149 Line EL	Electronic	54	T5 1x49	2,16	IP 65
700452252046	FCW 111 249 Line EL	Electronic	116	T5 2x49	2,72	IP 65


FCW 111 are available with IP66 protection

FCW 111 136

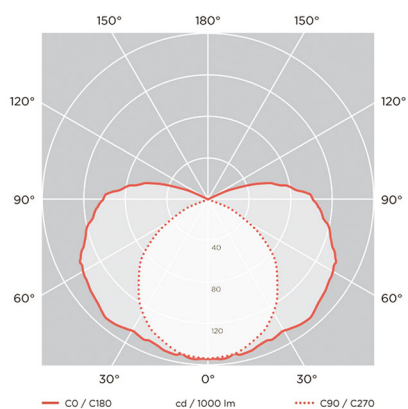

FCW 111 236

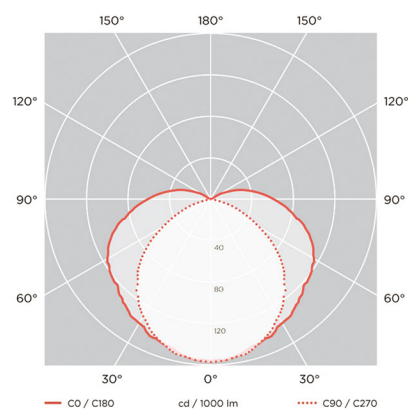

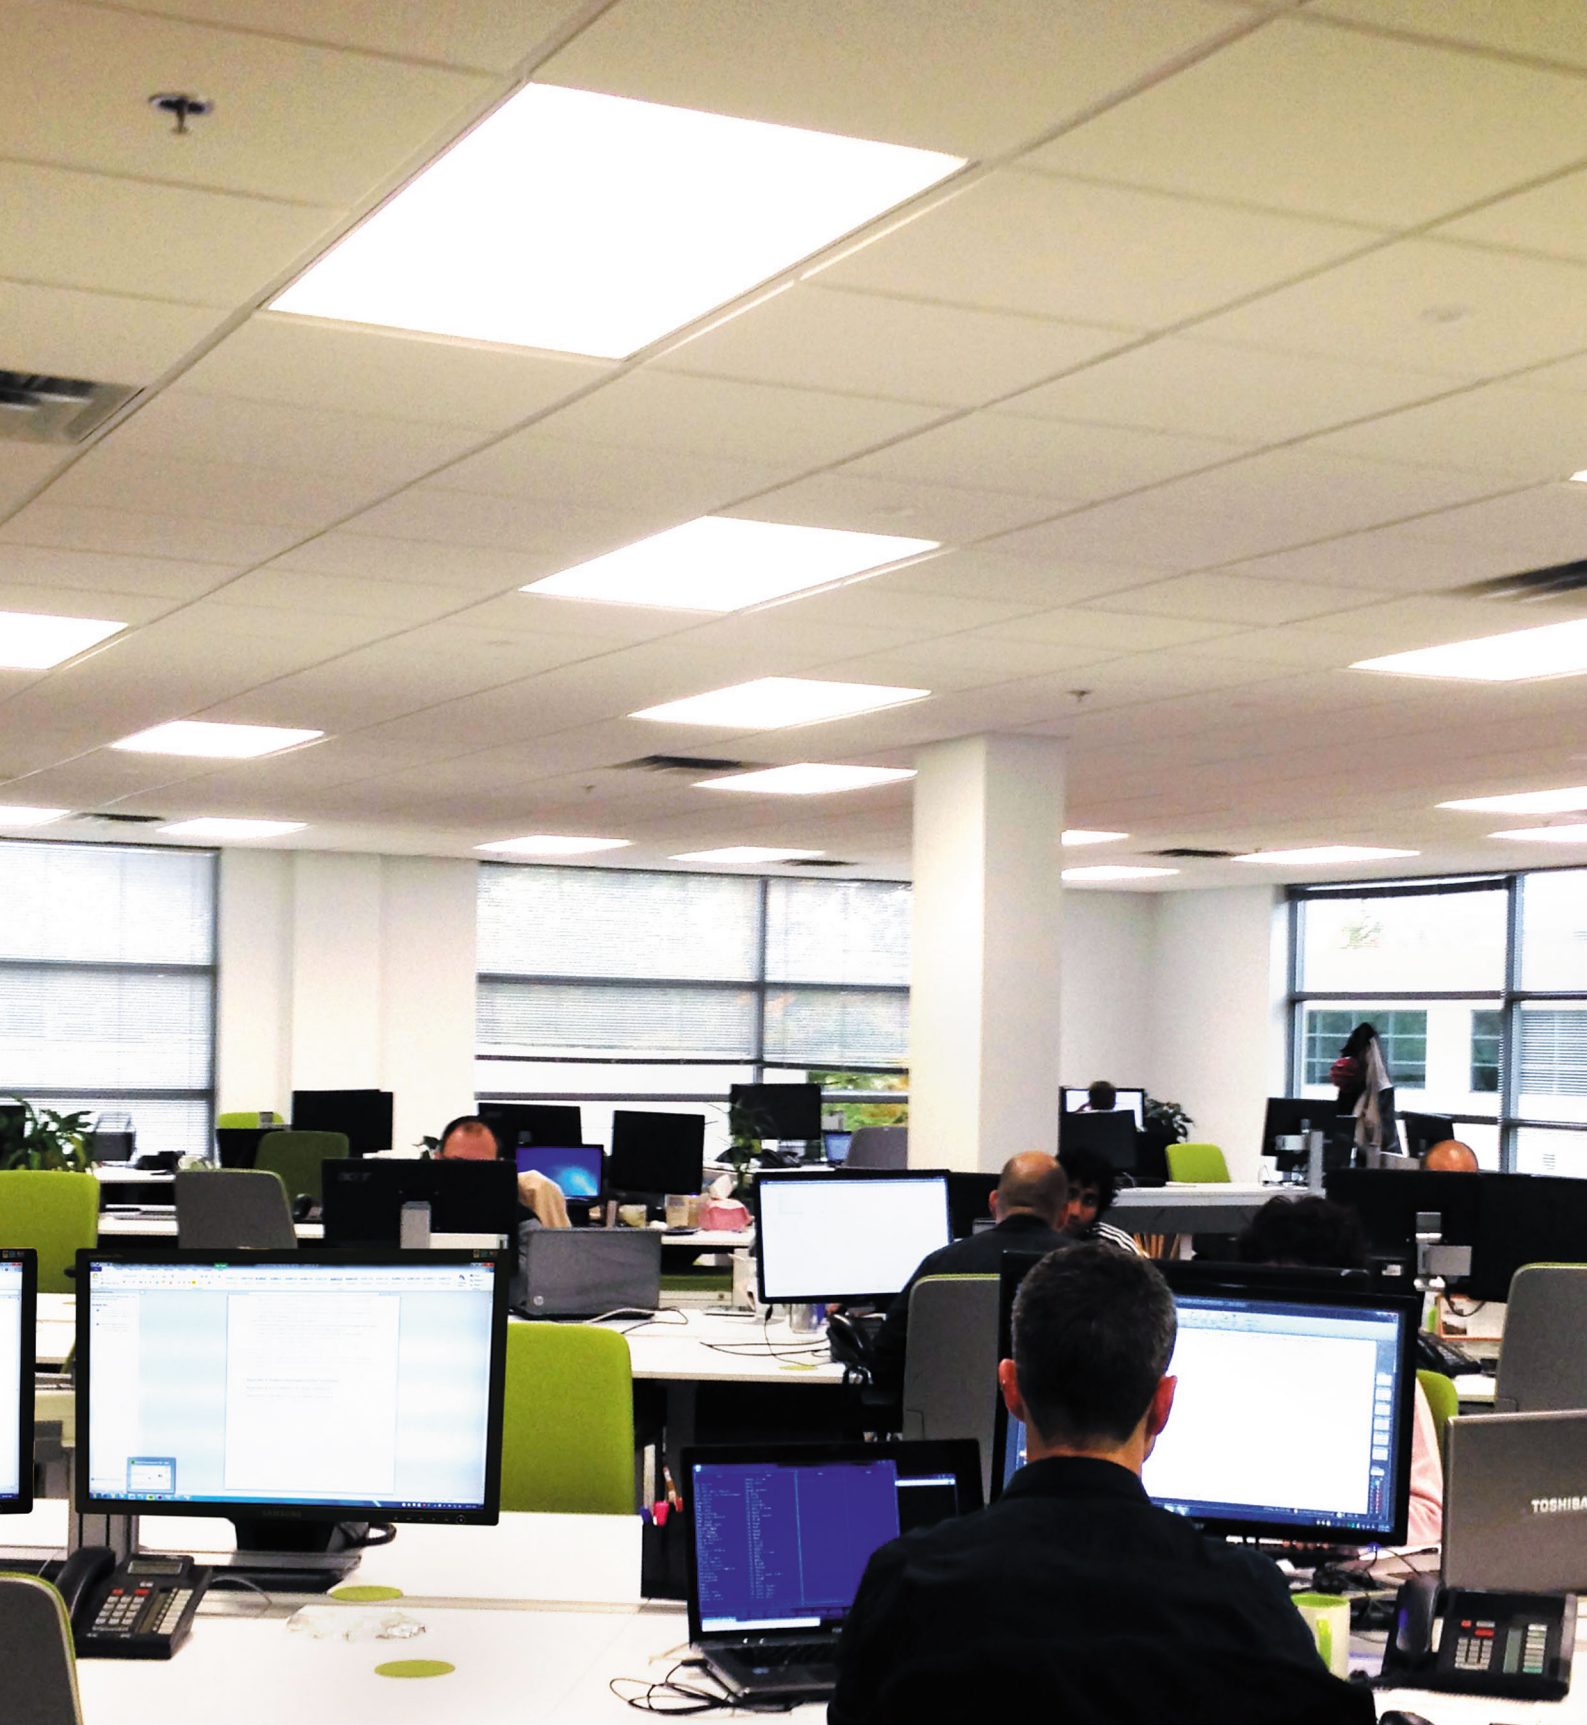

INDOOR LUMINAIRES