

Spotlighting




DTP 100



Type	DTP100
Warranty period	5 years
Light source	COB Philips SLM G7
Driver	Driver included
Input voltage	220 to 240 V
Power factor	0,95
Power consumption tolerance	+/- 10%
Initial luminous flux	900 lm (light color 3000K)
Initial LED luminaire efficacy	113 lm/W depending on the type
Luminous flux tolerance	+/- 10%
Light color	2700K, 3000 K, 3500K, 4000K
Color rendering index (CRI)	80 as a standart, 90 on request

Operating temperature range	0 to +35 °C
Median useful life L80B50	50000 hours
Reflector material	Faceted anodized aluminum
Optical cover / lens finish	Clear
Body material	Aluminium
Finishing	White or Black
Installation	Track mounted
Impact resistance	IK02
Ingress protection	IP20
Electrical safety	Class I or II
Application	• Shops • Showrooms • Meeting rooms • Circulation areas • Hospitality

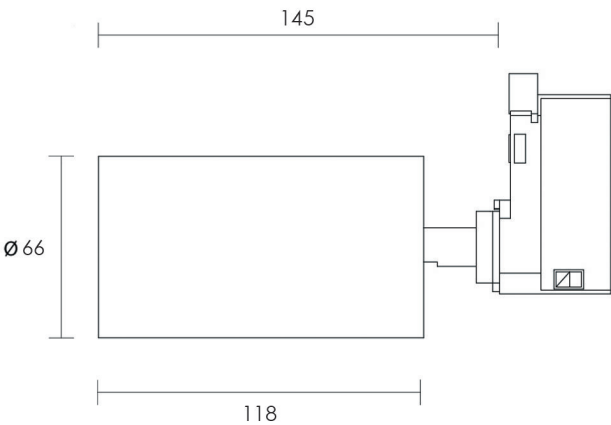

Benefits:

- LED accent-lighting solution with a reasonable payback compared to conventional technologies
- Suitable for food and fashion retailers
- Available in a choice of black or white finish

Product family range

EOC	Description	Color K	Track adaptor	COB	Power W	Finish	Beam Angle for the Reflector
700151452101	DTP100 LED900 8W 15DGR WH	3000	Global 3phase	Philips SLM G7	8	White	15
700151452102	DTP100 LED900 8W 25DGR WH	3000	Global 3phase	Philips SLM G7	8	White	25
700151452103	DTP100 LED900 8W 35DGR WH	3000	Global 3phase	Philips SLM G7	8	White	35
700151452104	DTP100 LED900 8W 15DGR BK	3000	Global 3phase	Philips SLM G7	8	Black	15
700151452105	DTP100 LED900 8W 25DGR BK	3000	Global 3phase	Philips SLM G7	8	Black	25
700151452106	DTP100 LED900 8W 35DGR BK	3000	Global 3phase	Philips SLM G7	8	Black	35

