

Spotlighting




DTP 101



Type	DTP101
Warranty period	5 years
Light source	Philips SLM G7
Driver	Driver included
Input voltage	220 to 240 V
Power factor	0,95
Power consuption tolerance	+/- 10%
Initial luminous flux	1350 lm (CRI830)
Initial LED luminaire efficacy	90 lm/W depending on the type
Luminous flux tolerance	+/- 10%
Light color	2700K, 3000 K, 3500K, 4000 K, 5000 K
Color rendering index (CRI)	80 as a standard, 927, 930 on request

Operating temperature range	0 to +35 °C
Median useful life L80B50	50000 hours
Reflector material	Faceted anodized aluminum
Optical cover / lens finish	Clear
Body material	Aluminium
Finishing	White or Black
Installation	Track mounted
Impact resistance	IK02
Ingress protection	IP20
Electrical safety	Class I or II
Application	• Shops • Showrooms • Meeting rooms • Circulation areas • Hospitality

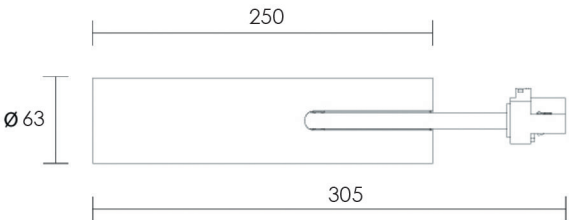

Benefits:

- LED accent-lighting solution with a reasonable payback compared to conventional technologies
- Suitable for food and fashion retailers
- Available in a choice of black or white finish



Product family range

EOC	Description	Color K	Track adaptor	COB	Power W	Finish	Beam Angle for the Reflector
700151452113	DTP101 LED1350 15W 830 15DGR WH	3000	Global 3phase	Philips SLM G7	15	White	15
700151452114	DTP101 LED1350 15W 830 25DGR WH	3000	Global 3phase	Philips SLM G7	15	White	25
700151452115	DTP101 LED1350 15W 830 35DGR WH	3000	Global 3phase	Philips SLM G7	15	White	35
700151452116	DTP101 LED1350 15W 830 15DGR BK	3000	Global 3phase	Philips SLM G7	15	Black	15
700151452117	DTP101 LED1350 15W 830 25DGR BK	3000	Global 3phase	Philips SLM G7	15	Black	25
700151452118	DTP101 LED1350 15W 830 35DGR BK	3000	Global 3phase	Philips SLM G7	15	Black	35

