

TAKTON MALMÖ

Mounting Instruction

Asennusohje / Monteringsanvisning




LED



~220V...240V
50/60Hz

IP66

IK09





Disconnect before servicing
Irrota ennen houltoa
Koppla bort innan service

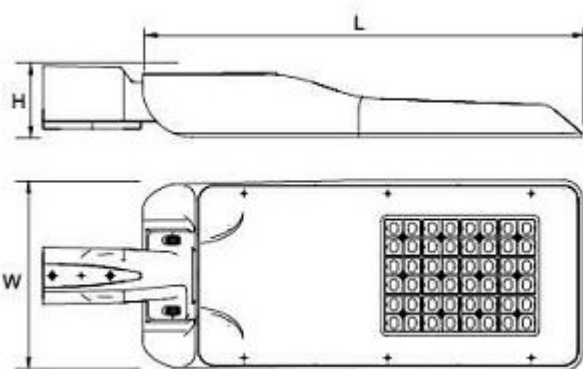

DKS 674 - 550x242x75 (LxWxH)


DKS 675 - 675x257x81,4 (LxWxH)

Net weight, no more / Nettopaino, ei enää / Nettovikt, inte mer: DKS674 - 4,5kg, DKS675 - 6,5kg







For version with cable/ Versiota varten kaapelilla/ För version med kabel




Blue/ Sininen/ Blå Yellow-green/ Kallenvihreä/ Gulgrön
Brown/ Ruskea/ Brun

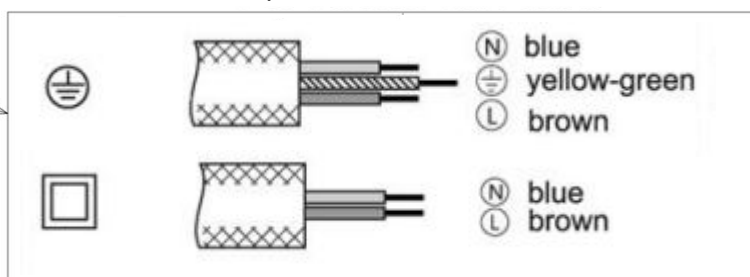

Constant Light Output/ Vakio valoteho/ Konstant ljusutgång

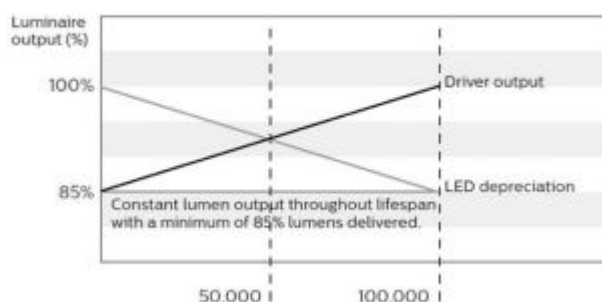

Auto dimming/ Automaattinen himmennys/ Automatisk dimming - Dynadimmer

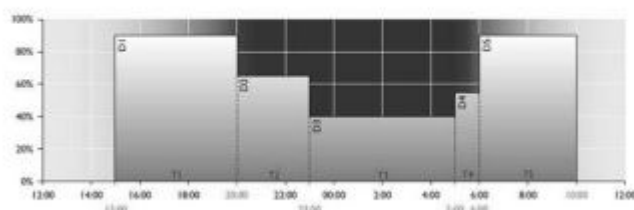

Led modules can be replaced by manufacturer only/ Led-moduulit voidaan korvata vain valmistajalla/
Ledda moduler kan endast bytas ut av tillverkaren.
Windage area, no more/ Tuuletusalue, ei enää/ Vindkraft område, inte mer:
DKS674 - 0,14m² above/below/yhääla/alhaala/ovan/nedan and/ja/och 0,042m²
side position/sivupaikassa/sidposition
DKS675 - 0,18m² above/below/yhääla/alhaala/ovan/nedan and/ja/och 0,055m²
side position/sivupaikassa/sidposition

