

DPL 197

LED	IP20	IK02	220V			
-----	------	------	------	--	--	--

Ceiling type: Exposed T-bar ceiling

Light source: Philips LED module

Input voltage: 220 to 240 V

Control gear: Electronic

Driver: Driver Tridonic included



Power factor: 0.95

Operation temperature range: -10°C to +30°C

Material:


Body: Painted steel

Optical cover: Opal polycarbonate diffuser

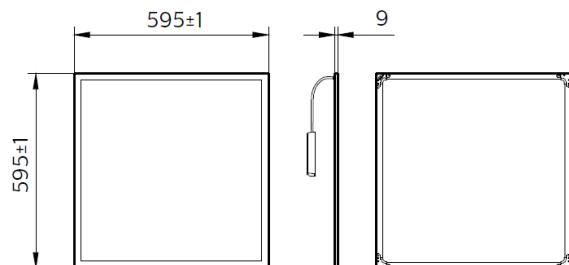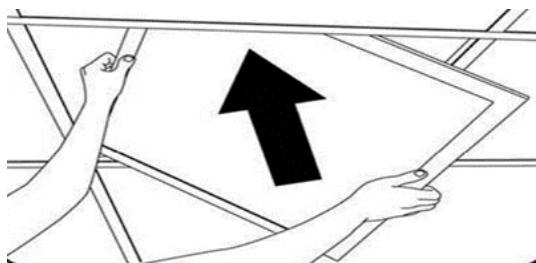

Code	Type	Power, W	Initial luminous flux, lm	Color, K	Ripple	UGR	Diffuser	Weight, kg
700151454001	DPL197 LED031 32W OP 840	32	3100	4000	<5%	20	Opal	2,5
700151454002	DPL197 LED031 32W OP 840 DALI	32	3100	4000	<5%	20	Opal	2,5
700151454003	DPL197 LED029 32W OP 830	32	2900	3000	<5%	20	Opal	2,5
700151454004	DPL197 LED029 32W OP 830 DALI	32	2900	3000	<5%	20	Opal	2,5

DALI Driver Connection

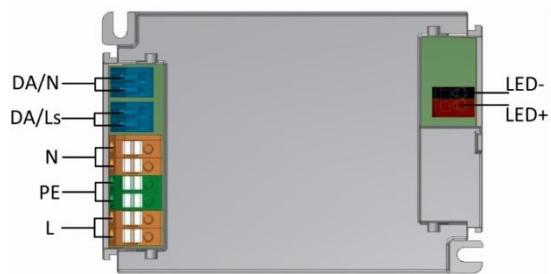

TAKTON uses tested components from the leading suppliers. However, isolated cases of LED failure during its expected lifetime may arise due to the technology of manufacturing. According to the international standards, a deviation of $\pm 10\%$ is allowed in the initial luminous flux given the power consumption, while the color temperature is regulated within $\pm 150\text{K}$ from its nominal value. Unless stated otherwise, these parameters imply the environment to be at 25°C . In the majority of products, a failure in one LED pixel does not cause deterioration of characteristics of the light, hence there are no grounds for complaint.