

DTP 104,105

TAKTON

Benefits:

- LED accent-lighting solution with a reasonable payback compared to conventional technologies
- Suitable for food and fashion retailers
- Available in a choice of black or white finish

FAMILY INFORMATION

Type

DTP

Warranty period

5 years

Light source

Philips SLM G7 Premium white

Driver

Philips Track Adaptor Driver included

Input voltage

220 – 240 V

Power factor

0,95

Power consumption tolerance

+/- 10%

Initial luminous flux

2500-3800 lm (CRI90) as a standard

3300-4700 lm (CRI80) on request

Initial LED luminaire efficacy

95lm/W

Luminous flux tolerance

+/- 10%

Light Color

3000K, as a standard 4000K on request

Color Rendering Index (CRI)

90 as a standard, 80 on request

Operating temperature range

0 to +35 °C

Median useful life L80B50

50000 hours

Reflector material

Faceted anodized aluminum

Installation

Track mounted

Beam angle

15, 25, 36, 60 dgr

Optical cover/lens finish

Clear

Body material

Aluminium

Finishing

White or Black

Impact resistance

IK02

Ingress protection

IP20

Electrical safety


Class I or II

Application


Shops • Show rooms • Meeting rooms • Circulation areas • Hospitality



DTP 105

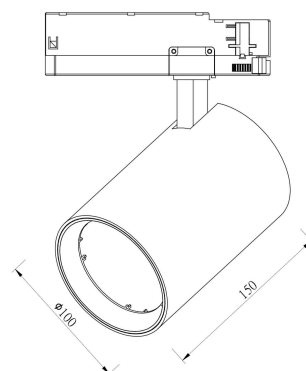

DTP 104

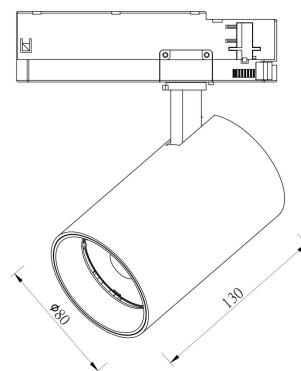

DTP 104,105

TAKTON

PRODUCT FAMILY RANGE

EOC	Description	Colour, K	CRI	Power W	luminous flux Lm	Track adaptor	FINISH	Beam Angle for the Reflector
700151452341	DTP104 LED025 27W 930 15DGR WH	3000	90	27	2500	Global 3phase	White	15
700151452342	DTP104 LED025 27W 930 25DGR WH	3000	90	27	2500	Global 3phase	White	25
700151452343	DTP104 LED025 27W 930 36DGR WH	3000	90	27	2500	Global 3phase	White	36
700151452353	DTP104 LED025 27W 930 60DGR WH	3000	90	27	2500	Global 3phase	White	60
700151452344	DTP104 LED025 27W 930 15DGR BK	3000	90	27	2500	Global 3phase	Black	15
700151452345	DTP104 LED0252 27W 930 25DGR BK	3000	90	27	2500	Global 3phase	Black	25
700151452346	DTP104 LED025 27W 930 36DGR BK	3000	90	27	2500	Global 3phase	Black	36
700151452354	DTP104 LED025 27W 930 60DGR BK	3000	90	27	2500	Global 3phase	Black	60
700151452347	DTP105 LED038 41W 930 15DGR WH	3000	90	41	3800	Global 3phase	White	15
700151452348	DTP105 LED038 41W 930 25DGR WH	3000	90	41	3800	Global 3phase	White	25
700151452349	DTP105 LED038 41W 930 36DGR WH	3000	90	41	3800	Global 3phase	White	36
700151452355	DTP105 LED038 41W 930 60DGR WH	3000	90	41	3800	Global 3phase	White	60
700151452350	DTP105 LED038 41W 930 15DGR BK	3000	90	41	3800	Global 3phase	Black	15
700151452351	DTP105 LED038 41W 930 25DGR BK	3000	90	41	3800	Global 3phase	Black	25
700151452352	DTP105 LED038 41W 930 36DGR BK	3000	90	41	3800	Global 3phase	Black	36
700151452356	DTP105 LED038 41W 930 60DGR BK	3000	90	41	3800	Global 3phase	Black	60